SHEET NO :- 01/02

LAY OUT PLAN

PROPOSED LAY OUT PLAN SHOWING RESIDENTIAL SUBPLOTTING BUILDING ON CITY SURVEY NO :- NA125 & NA125p1 (OLD SURVEY NO :- 729p) .

AT :- PIPLI , TA :- DHOLERA , DIST :- AHMEDABAD .

USE :- RESIDENTIAL (R & DW-2) SCALE:- 1:00 CM = 5.00 MTS

AREA TABLE	IN SQ.MTS
AREA OF CITY SURVEY NO - NA125 (OLD SURVEY NO :- 729p)	8223.00
AREA OF CITY SURVEY NO - NA125p1 (OLD SURVEY NO :- 729p)	16,187.00
TOTAL PLOT AREA	24,410.00
REQUIRED COMMON PLOT @ 10 % OF (24,410.00)	2441.00
PROVIDED COMMON PLOT	2455.05
TOTAL SUB PLOT AREA	15,109.22
TOTAL BUILT - UP AREA OM G.F	1993.41
TOTAL BUILT-UP AREA ON ALL FLOORS	1993.41
F.S.I. AREA TABLE	**IN SQ.MTS**
PERMISSIBLE F.S.I. @ 1.1.2 (15,109.22 x 1.2 = 18,131.07)	18,131.07
TOTAL PROVIDED F.S.I. AT G.F	1993.41
TOTAL PROVIDED F.S.I. AT ALL FLOORS	1993.41
BALANCE F.S.I.	16,137.66
HEIGHT OF BUILDING	3.81 MT
TREE PLANTATION CALCULATION	
REQUIRED = (24,410 * 5)/ 200 = 610.24 NOS. , SAY 611 NOS.	611 NOS.
PROVIDED	611 NOS.
PERCOLATING WELL CALCULATION	
REQUIRED = (24,410) / 4000 = 6.10 NOS. , SAY 7 NOS.	7 NOS.
PROVIDED	7 NOS.

COLOUR NOTE.

PROP. WORK		SURVEY NO. BOUNDRY	
ROAD		SUBPLOT BOUNDRY	
COMMON PLOT		DRAINAGE LINE	
CONTROL LINE		PERCOLATING WELL	P.W.

NOTE :-
- ALL DIMENSION ARE IN METER .
- S.NO - SURVEY NUMBER .
- @ TO @ CROSS OVER ROAD .
- B.C.L - BUILDING CONTROL LINE .
- R - RADIUS .
- C.P - COMMON PLOT .
- C.L - CONTROL LINE .
- DRAINAGE TO BE PROVIDED SEPTIK TANK AND SOCK WELL .

For, Kavyan Developers Private Limited

Director

KAVYAN DEVELOPERS PVT. LTD. THROUGH ITS DIRECTOR
VIVEK SHAMBHUDAYAL KHANDELWAL

OWNER'S NAME & SIGNATURE

AJAY D. PRAJAPATI
(ENGINEER)
AMC LIC No.0018/98124/013010537
15/Nandganand Society Swaminarayan,
Kathwada Road, Nava Naroda, Ahmedabad

ENGINEER

AJAY D. PRAJAPATI
(STR. ENGINEER)
AMC LIC No.0018E124/013010058
15/Nandganand Society Swaminarayan,
Kathwada Road, Nava Naroda, Ahmedabad

STR. ENGINEER

ENGINEER CERTIFICATE :-
CERTIFIED THAT THE PLOT UNDER REFERENCE WAS SURVEYED BY ME ON 20/05/2018 & THE DIMENSION OF SIDES ETC.OF PLOT STATED ON PLAN ARE AS MEASURED. THE PLOT IS BOUNDED AS SHOWN AND LAID OUT TALLIES WITH THE AREA STATED IN THE DOCUMENT OF OWNERSHIP.

AJAY D. PRAJAPATI
(ENGINEER)
AMC LIC No.0018/98124/013010537
15/Nandganand Society Swaminarayan,
Kathwada Road, Nava Naroda, Ahmedabad

ENGINEER

AUTHORITY

BUILT - UP & F.S.I. AREA TABLE

SR. NO	S.P NO	PLOT AREA	USE	BUILT - UP AREA		PERMISSIBLE F.S.I. @ 1.1.2	F.S.I. AREA		BALANCE F.S.I.
				G.F	TOTAL		G.F	TOTAL	
1	K-01	326.20	RES	18.63	18.63	391.44	18.63	18.63	372.81
2	K-02	154.92	RES	18.63	18.63	185.90	18.63	18.63	167.27
3	K-53	148.32	RES	18.63	18.63	177.98	18.63	18.63	159.35
4	K-54	141.64	RES	18.63	18.63	169.97	18.63	18.63	151.34
5	K-55	135.00	RES	18.63	18.63	162.00	18.63	18.63	143.37
6	K-56	128.36	RES	18.63	18.63	154.03	18.63	18.63	136.40
7	K-57	124.24	RES	18.63	18.63	149.09	18.63	18.63	130.46
8	K-58	137.24	RES	18.63	18.63	164.69	18.63	18.63	146.06
9	K-59	140.72	RES	18.63	18.63	168.86	18.63	18.63	150.23
10	K-60	140.72	RES	18.63	18.63	168.86	18.63	18.63	150.23
11	K-61	140.72	RES	18.63	18.63	168.86	18.63	18.63	150.23
12	K-62	169.73	RES	18.63	18.63	203.67	18.63	18.63	185.04
13	K-63	124.60	RES	18.63	18.63	149.52	18.63	18.63	130.89
14	K-64	129.60	RES	18.63	18.63	155.52	18.63	18.63	136.89
15	K-65	125.60	RES	18.63	18.63	150.72	18.63	18.63	132.09
16	K-66	121.25	RES	18.63	18.63	145.50	18.63	18.63	126.87
17	K-67	204.80	RES	18.63	18.63	245.76	18.63	18.63	227.13
18	K-68	177.78	RES	18.63	18.63	213.34	18.63	18.63	194.71
19	Y-1	142.16	RES	18.63	18.63	170.59	18.63	18.63	151.96
20	Y-2A	91.22	RES	18.63	18.63	182.24	18.63	18.63	163.61
21	Y-2B	130.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
22	Y-4	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
23	Y-5	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
24	Y-6	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
25	Y-7	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
26	Y-8	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
27	Y-9	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
28	Y-10	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
29	Y-11A	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
30	Y-11B	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
31	Y-12	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
32	Y-13	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
33	Y-14	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
34	Y-15	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
35	Y-16	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
36	Y-17	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
37	Y-18	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
38	Y-19	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
39	Y-20	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
40	Y-21	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
41	Y-22	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
42	Y-23	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
43	Y-24	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
44	Y-25	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
45	Y-26	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
46	Y-27	135.20	RES	18.63	18.63	182.24	18.63	18.63	163.61
47	Y-28	207.41	RES	18.63	18.63	248.89	18.63	18.63	230.26
48	Y-29	241.66	RES	18.63	18.63	290.02	18.63	18.63	271.39
49	Y-30	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
50	Y-31	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
51	Y-32	190.65	RES	18.63	18.63	228.78	18.63	18.63	210.15
52	Y-33	166.34	RES	18.63	18.63	199.61	18.63	18.63	180.98
53	Y-34	125.02	RES	18.63	18.63	150.02	18.63	18.63	131.39
54	Y-35	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
55	Y-36	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
56	Y-37	188.47	RES	18.63	18.63	226.16	18.63	18.63	207.53
57	Y-38	228.82	RES	18.63	18.63	274.58	18.63	18.63	255.95
58	Y-39	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
59	Y-40	126.00	RES	18.63	18.63	151.20	18.63	18.63	132.57
60	Y-41	122.64	RES	18.63	18.63	147.17	18.63	18.63	128.54
61	Y-42	125.02	RES	18.63	18.63	150.02	18.63	18.63	131.39
62	Y-43	125.02	RES	18.63	18.63	150.02	18.63	18.63	131.39
63	Y-44	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
64	Y-45	126.00	RES	18.63	18.63	151.20	18.63	18.63	132.57
65	Y-46	122.64	RES	18.63	18.63	147.17	18.63	18.63	128.54
66	Y-47	125.02	RES	18.63	18.63	150.02	18.63	18.63	131.39
67	Y-48	125.02	RES	18.63	18.63	150.02	18.63	18.63	131.39
68	Y-49	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
69	Y-50	126.00	RES	18.63	18.63	151.20	18.63	18.63	132.57
70	Y-51	122.64	RES	18.63	18.63	147.17	18.63	18.63	128.54
71	Y-52	125.02	RES	18.63	18.63	150.02	18.63	18.63	131.39
72	Y-53	121.65	RES	18.63	18.63	145.98	18.63	18.63	127.35
73	Y-54	191.66	RES	18.63	18.63	182.03	18.63	18.63	163.40
74	Y-55	148.60	RES	18.63	18.63	178.39	18.63	18.63	159.76
75	Y-56	166.39	RES	18.63	18.63	199.70	18.63	18.63	181.07
76	Y-57	147.30	RES	18.63	18.63	176.76	18.63	18.63	158.13
77	Y-58	149.31	RES	18.63	18.63	179.17	18.63	18.63	160.54
78	Y-59	149.31	RES	18.63	18.63	174.25	18.63	18.63	155.62
79	Y-60	140.07	RES	18.63	18.63	168.08	18.63	18.63	149.45
80	Y-61	140.07	RES	18.63	18.63	168.08	18.63	18.63	149.45
81	Y-62	138.55	RES	18.63	18.63	166.26	18.63	18.63	147.63
82	Y-63	138.44	RES	18.63	18.63	166.13	18.63	18.63	147.50
83	Y-64	134.26	RES	18.63	18.63	161.14	18.63	18.63	142.51
84	Y-65	129.98	RES	18.63	18.63	155.98	18.63	18.63	137.35
85	Y-66	129.98	RES	18.63	18.63	155.98	18.63	18.63	137.35
86	Y-67	127.94	RES	18.63	18.63	153.41	18.63	18.63	134.78
87	Y-68	129.71	RES	18.63	18.63	155.65	18.63	18.63	137.02
88	Y-69	129.57	RES	18.63	18.63	148.28	18.63	18.63	129.65
89	Y-70	117.55	RES	18.63	18.63	141.06	18.63	18.63	122.43
90	Y-71	142.13	RES	18.63	18.63	170.56	18.63	18.63	151.93
91	Y-72	148.73	RES	18.63	18.63	178.48	18.63	18.63	159.85
92	Y-73	160.64	RES	18.63	18.63	192.77	18.63	18.63	174.14
93	Y-74	166.83	RES	18.63	18.63	200.20	18.63	18.63	181.57
94	Y-75 TO Y-90	2124.00	RES	18.63	18.63	159.30	18.63	18.63	140.67
95	Y-75	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
96	Y-76	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
97	Y-77	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
98	Y-78	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
99	Y-79	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
100	Y-80	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
101	Y-81	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
102	Y-82	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
103	Y-83	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
104	Y-84	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
105	Y-85	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
106	Y-86	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
107	Y-90	132.75	RES	18.63	18.63	159.30	18.63	18.63	140.67
TOTAL S.P - 107		15109.22	-	1993.41	1993.41	18131.07	1993.41	1993.41	16137.66

SUB PLOT AREA CALCULATION

SUB PLOT NO.	SUB PLOT AREA	IN SQ.MTS.
K-01	¼ x (13.58 + 12.92) x 25.09 = 333.94 sq.mts. Less Curv. :- 2 x 0.5 x 0.5 x 22 = 11.74 sq.mts. Net Plot Area = 326.20 sq.mts.	326.20
K-02	¼ x 11.77 + 16.90) x 8.00 = 114.00 sq.mts.	154.92
K-53	¼ x (18.98 + 18.12) x 8.00 = 148.32 sq.mts.	148.32
K-54	¼ x (18.12 + 17.29) x 8.00 = 141.64 sq.mts.	141.64
K-55	¼ x (17.29 + 16.46) x 8.00 = 135.00 sq.mts.	135.00
K-56	¼ x (16.46 + 15.63) x 8.00 = 128.36 sq.mts.	128.36
K-57	¼ x (15.63 + 14.79) x 8.44 = 128.24 sq.mts. 8.05 x 17.50 = 141.59 sq.mts. Less Curv. :- 2 x 0.5 x 0.5 x 22 = 17.94 sq.mts. Net Plot Area = 137.24 sq.mts.	137.24
K-59 TO K-61	8.00 x 17.59 = 140.72 sq.mts. 140.72 x 03 NOS. = 422.16 sq.mts.	422.16
K-62	¼ x (7.30 + 10.19) x 19.34 = 169.12 sq.mts.	169.12
K-63	¼ x (15.65 + 8.30) x 21.39 = 204.87 sq.mts.	204.87
K-64 & K-65	8.00 x 15.70 = 125.60 sq.mts. 125.60 x 02 NOS. = 251.20 sq.mts.	251.20
K-66	8.00 x 15.70 = 125.60 sq.mts. Less Curv. (0.215 x 0.00 x 8.00) = 7.74 sq.mts. Net Plot Area = 121.25 sq.mts.	121.25
K-67	12.80 x 16.00 = 204.80 sq.mts.	204.80
K-68	¼ x (11.26 + 11.90) x 16.00 = 185.52 sq.mts. Less Curv. (0.215 x 0.00 x 8.00) = 7.74 sq.mts. Net Plot Area = 177.78 sq.mts.	177.78
Y-1	¼ x (8.68 + 8.67) x 16.66 = 140.90 sq.mts. Less Curv. (0.215 x 0.00 x 8.00) = 7.74 sq.mts. Net Plot Area = 142.16 sq.mts.	142.16
Y-2A TO Y-10 Y-12A TO Y-27	135.20 x 25 NOS. = 3380.00 sq.mts.	3380.00
Y-28	¼ x (8.60 + 10.41) x 20.94 = 207.41 sq.mts.	207.41
Y-29	¼ x (10.68 + 12.30) x 21.68 = 249.42 sq.mts. Less Curv. (0.215 x 0.00 x 8.00) = 7.74 sq.mts. Net Plot Area = 241.66 sq.mts.	241.66
Y-30, Y-36 Y-45, Y-51 Y-60, Y-61	9.00 x 14.00 = 126.00 sq.mts. Less Curv. (0.215 x 0.00 x 8.00) = 4.35 sq.mts. Net Plot Area = 121.65 sq.mts. 121.65 x 08 NOS. = 973.20 sq.mts.	973.20
Y-31, Y-34 Y-37, Y-40 Y-43, Y-46 Y-49, Y-52	9.00 x 14.00 = 126.00 sq.mts. 126.00 x 08 NOS. = 1008.00 sq.mts.	1008.00
Y-32	¼ x (8.25 + 9.94) x 19.87 = 180.65 sq.mts.	190.65
Y-33	¼ x (8.94 + 9.27) x 18.68 = 166.34 sq.mts.	166.34
Y-35	¼ x (8.74 + 10.07) x 24.33 = 228.82 sq.mts.	228.82
Y-41	¼ x (8.82 + 9.70) x 14.00 = 122.64 sq.mts.	122.64
Y-42	¼ x (8.87 + 8.99) x 14.00 = 125.02 sq.mts.	125.02
Y-47	¼ x (9.11 + 8.99) x 14.00 = 126.70 sq.mts.	126.70
Y-48	¼ x (9.09 + 9.21) x 14.00 = 128.10 sq.mts.	128.10
Y-53	¼ x (9.33 + 9.21) x 14.00 = 129.78 sq.mts.	129.78
Y-54	¼ x (9.01 + 7.71) x 20.06 = 157.67 sq.mts.	157.67
Y-55	¼ x (7.90 + 7.64) x 19.46 = 151.69 sq.mts.	151.69
Y-56	¼ x (8.10 + 8.54) x 18.39 = 153.00 sq.mts. Less Curv. (0.215 x 4.00 x 4.00) = 4.35 sq.mts. Net Plot Area = 148.65 sq.mts.	148.65
Y-57	¼ x (8.57 + 8.55) x 18.65 = 159.54 sq.mts. Less Curv. (0.215 x 4.00 x 4.00) = 4.35 sq.mts. Net Plot Area = 155.19 sq.mts.	155.29
Y-58	¼ x (7.61 + 7.72) x 19.23 = 147.39 sq.mts.	147.39
Y-59	¼ x (7.59 + 7.89) x 19.02 = 145.21 sq.mts.	145.21
Y-60	¼ x (7.65 + 8.91) x 18.24 = 132.78 sq.mts.	132.78
Y-61	¼ x (15.79 + 15.51) x 9.00 = 140.67 sq.mts.	140.67
Y-62	¼ x (15.51 + 15.26) x 9.00 = 138.55 sq.mts.	138.55
Y-63	¼ x (15.26 + 15.04) x 9.00 = 136.44 sq.mts.	136.44
Y-64	¼ x (15.04 + 14.80) x 9.00 = 134.28 sq.mts.	134.28
Y-65	¼ x (14.80 + 14.56) x 9.00 = 132.12 sq.mts.	132.12
Y-66	¼ x (14.56 + 14.32) x 9.00 = 129.96 sq.mts.	129.96
Y-67	¼ x (14.32 + 14.09) x 9.00 = 127.94 sq.mts.	127.94
Y-68	¼ x (14.09 + 13.85) x 9.00 = 125.73 sq.mts.	125.73
Y-69	¼ x (13.85 + 13.61) x 9.00 = 123.57 sq.mts.	123.57
Y-70	¼ x (13.61 + 13.36) x 9.00 = 121.90 sq.mts. Less Curv. (0.215 x 4.00 x 4.00) = 4.35 sq.mts. Net Plot Area = 117.55 sq.mts.	117.55
Y-71	¼ x (7.51 + 8.56) x 17.69 = 142.13 sq.mts.	142.13
Y-72	¼ x (7.15 + 9.10) x 18.25 = 148.73 sq.mts.	148.73
Y-73	¼ x (7.71 + 9.20) x 19.54 = 164.64 sq.mts. Less Curv. (0.215 x 4.00 x 4.00) = 4.00 sq.mts. Net Plot Area = 160.64 sq.mts.	160.64
Y-74	¼ x (7.80 + 11.41) x 17.37 = 166.83 sq.mts.	166.83
Y-75 TO Y-90	8.00 x 14.79 = 132.75 sq.mts. 132.75 x 16 NOS. = 2124.00 sq.mts.	2124.00
TOTAL - 107	TOTAL SUB PLOT AREA	15,109.22

COMMON PLOT AREA CALCULATION :-

REQ. COMMON PLOT 10% OF RESI. AREA
= 10 % OF (24,410.00 SQ.MTS.
= 2441.00 SQ.MTS.

COMMON PLOT :- 3
¼ x (10.38 + 12.18) x 21.55 = 434.75 sq.mts.
C.P :- 3 = 434.75 sq.mts.

COMMON PLOT :- 4
1) ¼ x (12.40 + 10.64) x 30.95 = 356.54 sq.mts.
2) ¼ x (11.71 + 7.85) x 28.81 = 282.73 sq.mts.
Less Curv. :- 0.215 x 4.00 x 4.00 = 4.35 sq.mts.
NET C.P :- 4 = 634.92 sq.mts.

COMMON PLOT :- 5
¼ x (11.77 + 9.16) x 21.02 = 220.20 sq.mts.
C.P :- 5 = 220.20 sq.mts.

COMMON PLOT :- 6
1) ¼ x (14.03 + 13.00) x 29.04 = 392.33 sq.mts.
2) ¼ x (8.03 + 7.67) x 16.81 = 131.95 sq.mts.
C.P :- 6 = 524.28 sq.mts.

COMMON PLOT :- 7
¼ x (16.95 + 18.29) x 36.10 = 635.90 sq.mts.
C.P :- 7 = 635.90 sq.mts.

TOTAL C.P = 2455.05 sq.mts.

CAR PARKING AREA CALCULATION :-

G.F PLINTH UNIT AREA = MORE THAN 100 Sq.Mts.
REQUIRED CAR PARKING UPTO 100 Sq.Mts. ITO 300 Sq.Mts. PLINTH AREA FOR 1 CAR PARKING.
= 1 CAR PARKING
THERE ARE NO G.F PLINTH UNIT AREA MORE THAN 100 SQ.MTS. EACH SUBPLOT
NO CAR PARKING REQUIRED

BUILT-UP F.S.I. AREA TABLE

USE	EQ. UNIT	G.F.	TOTAL
RESI.	107	18.63 x 107 = 1993.41	1993.41

SEPTIC TANK TABLE

TYPE	NO. OF USER	REQ. SIZE AS PER I.S.	PRO. SIZE	NO.
-	107 x 5 = 535	2.30 x 1.10 x 1.30	2.30 x 1.10 x 1.30	107

SOCK WELL TABLE

TYPE	NO. OF USER	REQ. SIZE AS PER I.S.			PRO. SIZE			NO.
		Dia	Depth		Dia	Depth		
-	107 x 5 = 535	3.00 mt.	7.10 mt.		3.00 mt.	7.10 mt.		107



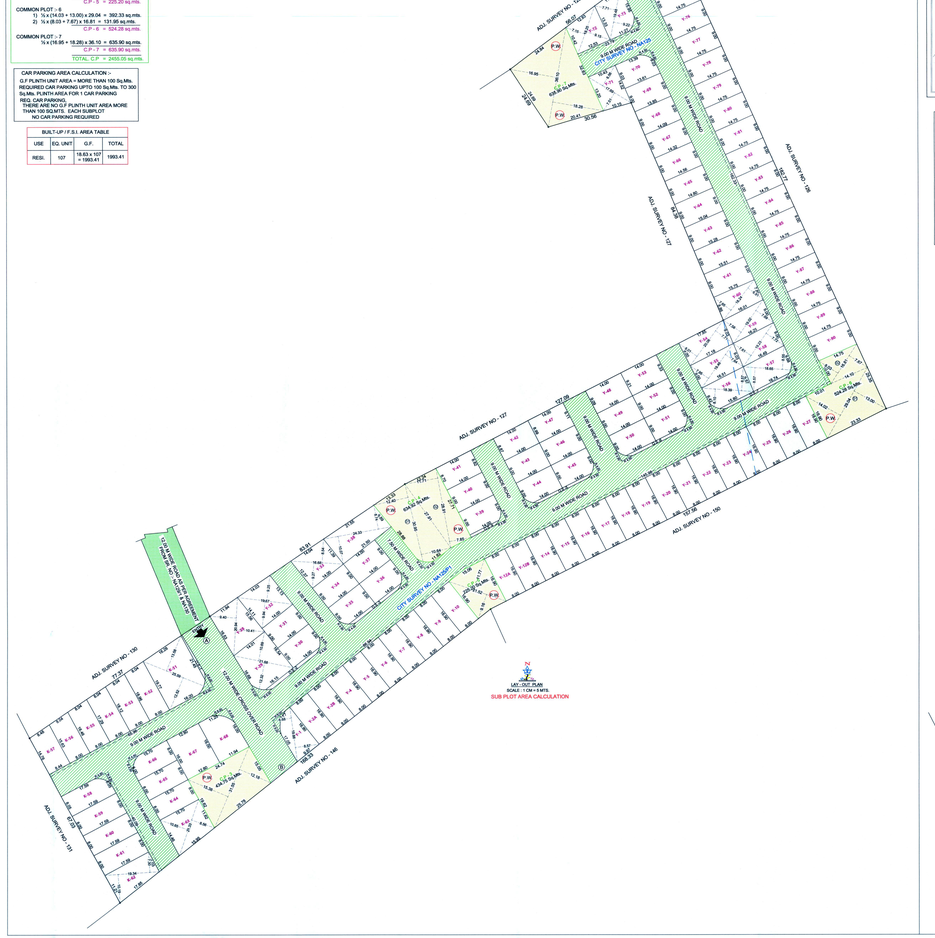

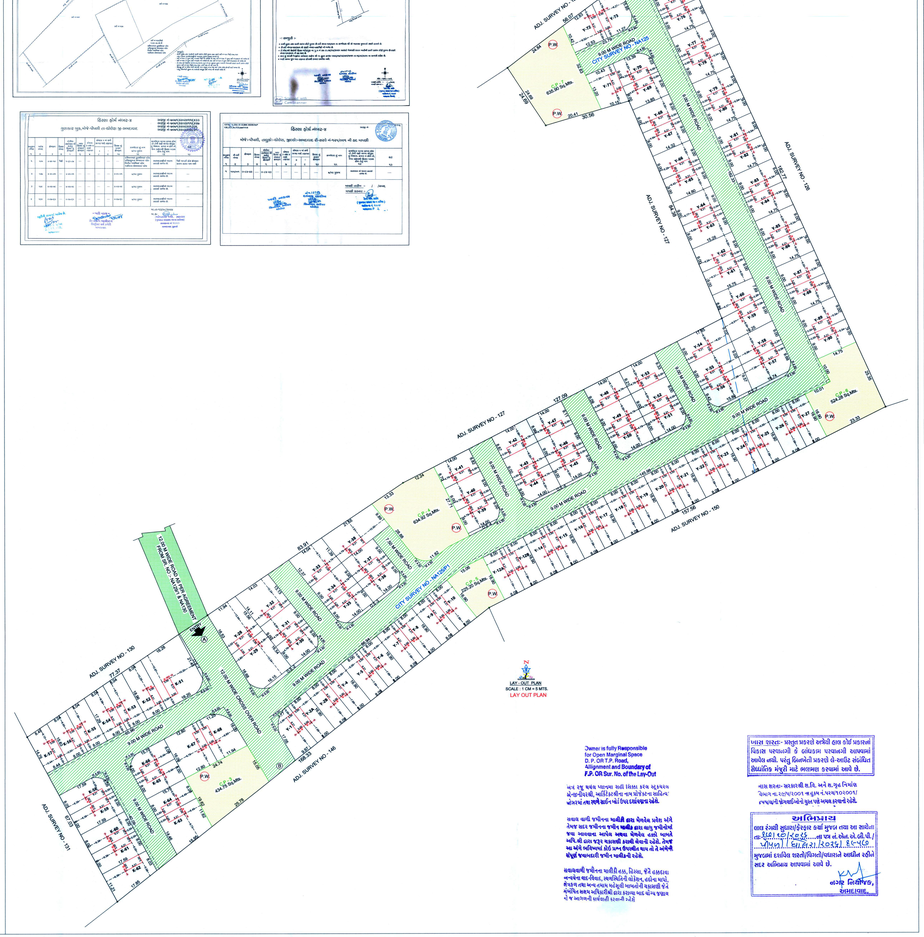

Owner is fully Responsible for Open Marginal Space D.P./ T.P. Road, Alignment and Boundary of F.P. OR Sur. No. of the Lay-Out

આ રજુ થયેલ ખાકામા આવી મિલકત કોઇ સરકારશ્રી/સ્થાનિક સ્વરાજ્ય સંસ્થાની માલિકીની જમીન/મકાનને અડોઅડ આવેલ હોય તો તેની પરવાનગી મેળવવાની રહેશે.

આવેલ તમારી જમીનના બાંધકામ સુધી ફાયર સેફટીના સાધનો પાણીની વ્યવસ્થા સાથે ફાયર સેફટી એક્ટ મુજબ જરૂરી સાધનો વસાવવાની રહેશે. તેમજ આ અંગે બાંધકામ કરી રહેલ એજન્સી/કોન્ટ્રાક્ટરની જવાબદારી રહેશે.

વરસાદી પાણીના પાણી નો, ડિસ્પોઝ, જે તે વોર્ડના/ઝોનના ઇજનેરશ્રીના અભિપ્રાય મુજબ કરવાનો રહેશે.

પ્લાન રજૂઆત- મંજૂરી પ્રસંગે આપેલી ફાયર ડીપી પ્રસંગમાં ડિઝાઇન પ્રમાણેની જ ફાયરના પ્રસંગમાંની વ્યવસ્થા આપેલ સાથે, પ્લાન્ટ ડિઝાઇનની સાથે તે બાંધકામ સંદર્ભિત ઇન્સ્ટોલેશન મંજૂરી સાથે આવશ્યક રજૂઆત કરવી રહેશે.

પ્લાન સ્કેલ:- આકારણી ની ફિ, અને ચો.મી.ના ઇન્ડેક્ષ નં.૦૧/૦૧/૨૦૦૧ મુજબ પ્લાનમાંથી ક્ષેત્રફળ/વિસ્તારની ગણતરી કરવાની રહેશે.

અભિપ્રાય

આ કેસની મુલાકાતદરમ્યાન કામ મુજબ તમો આ સાથેના ના.ઈ.ઈ/૨૦૧૮/૨૦૩૩ ..... નો પત્ર તા.૨૩/૦૫/૨૦૧૮ ..... મુજબનો ( ) ક્ષેત્ર.૨૦૨૧/૨૦૧૮) ક્ષેત્ર.૦૫/૦૫/૨૦૧૮ મુજબનો અભિપ્રાય આપવામાં આવેલ છે.

મદદનીશ ઇજનેરશ્રી,
ઝોનલ ઓફિસ,